

Applications:

- Park lighting
- Security lighting
- Post lanterns
- Decorative and area lighting

Design Details

- Filtered silicon light sensor
- MOV rated for 190 Joule/4500 Amp
- Instant turn-on, standard 5-10 second turn-off time delay
- 12", 200°C, 16 GA stranded leads
- Not approved for use on LED fixtures

Regulatory Listings

- ANSI C136.24 Compliant
- UL listed
- ROHS compliant

Operating Characteristics

- Voltage 105 to 400 VAC, 60Hz




Six Year Warranty: The DBE series controls are warranted to be free of manufacturing quality defects for a period of (6) years from the date of sale.

ORDERING INFORMATION

Example: DBE124 1.5 TUL J12

Series Code & Voltage	Turn-on Level (ftc)	Time Delay	Certification	Package Qty.
DBE120 120 Volts (105-130)	1.5 ANSI Standard	T 5-10 Second Turn-off Delay	U CSA Listed ¹ UL UL Listed ²	J12 12 Units
DBE124 120 - 277 Volts (105-305)				J25 25 Units
DBE347 347 Volts (300-400)				

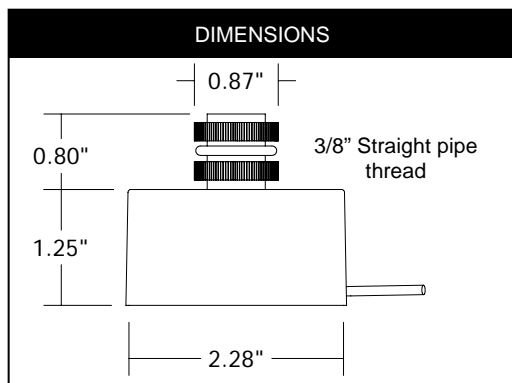

Notes:

- 1 DBE347 & DBE120only
- 2 DBE 124 Only